

Series II RED Line

REPLACEMENT FILTER




USER MANUAL

Model Number 67028

EPA Est. No 71766-UT-001

COMPONENTS

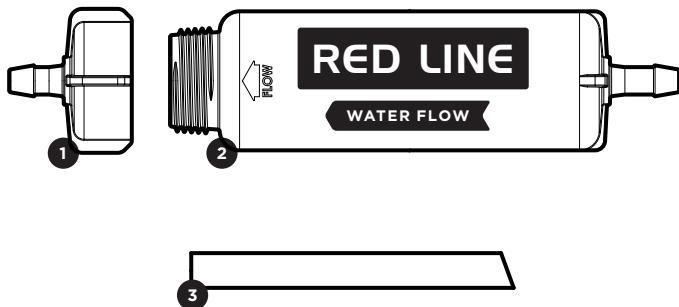

PARTS LIST

PART #	ITEM NAME
1	045294-033 Barbed Adapter
2	076721-033 RED Line Series II Filter
3	050110 Straw

FRONTIER REPLACEMENT FILTER

INTRODUCTION

Thank you for purchasing the Frontier Series II, RED Line Replacement Filter. The Series II filter capsule is designed for use in Frontier Flow Water Bottles or for "in-line" filter applications.

To ensure proper installation and performance please refer to Frontier Flow Filtered Water Bottle Instructions.

FEATURES

- RED Line Filter Meets US EPA Purifier Test Standards for the reduction of virus, bacteria and protozoans
- Series II filter capsule is compatible with all Frontier Flow Water Bottles
- Barbed connections can be used for "in-line" filter applications

CAUTIONARY STATEMENTS

- CAUTION - Do not freeze filter or expose filter to extreme temperatures

FOR USE WITH:


FRONTIER™ FLOW FILTERED WATER BOTTLES



PART #	ITEM NAME
67015, 67026	Frontier™ Flow Water Bottle

PRODUCT INSTRUCTIONS

IN-LINE APPLICATIONS

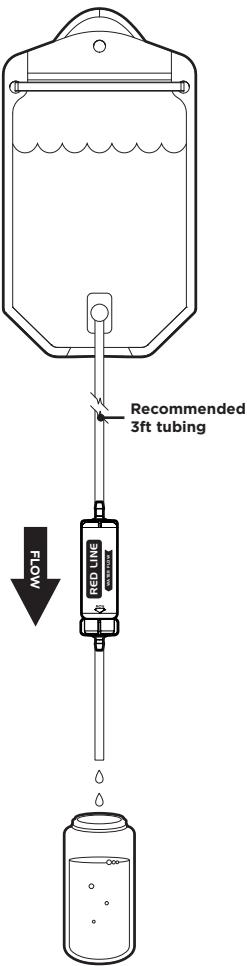

STEP 1

Determine the best location in for the filter.

NOTE: For gravity systems we recommend a minimum of 36" from the reservoir. Increasing the distance between the reservoir and the filter will improve the flow.

Mark the tube and make a clean cut.

STEP 2

Connect the inlet end of the filter **②** to the outlet tube from the reservoir by pressing the tubing firmly over the barbed connector.

Connect the outlet end of the filter **①** to the outlet end of the tube.

STEP 3

Hang the reservoir with the Series II filter at the lowest point and allow gravity to force water through the filter.

STEP 4

If the filter is dry, squeezing or rolling the reservoir will help start the flow.

MAINTENANCE AND STORAGE

1. Filter may be stored wet for short periods of time (<30 days).
2. If you need to store the filter for long periods of time (>30 days):
 - a. Remove adapter and straw.
 - b. Shake out any excess water and allow the filter to dry at least 48 hrs. prior to storage.
 - c. Store in a cool, dry place. Do not store in a sealed container.
3. D not freeze filter or expose filter to extreme temperatures.

TECHNICAL INFORMATION

FILTER CARTRIDGES

PARAMETER	WaterBasics® RED Line Series II Filter
Service Life	120 Gal. (454 L)
Flow Rate	up to 500 ml/min
Operating Temperatures	35-120° F (1.6-49° C)
Operating Pressures	0-3 psi (0-0.211 kg f/cm ²)
Use Conditions	Use best water source available, quality of the source water may vary.
Removal	
Virus Removal	≥99.99%
Bacteria Removal	≥99.9999%
Cyst Removal	≥99.95%
Chlorine, Chemical, Taste & Odor Removal	MEETS OR EXCEEDS ANSI/NSF 42

LIMITED WARRANTY AND DISCLAIMER

Aquamira warrants all products to be free from defects in workmanship and materials for one year from the date of purchase by the consumer, or for the duration of the imprinted shelf life. Filter clogging or normal wear is not a defect. If you are not satisfied with the performance of an Aquamira product, Aquamira will repair or replace the product.

Aquamira Technologies, Inc. (Aquamira) hereby excludes any expressed or implied warranties of fitness for a particular purpose. The following is made in lieu of any such warranties: The information and specifications supplied by Aquamira are based on industry standards and are tested using standard laboratory test conditions which are accepted in the industry to be reliable. Aquamira does not guarantee that any result shown or claimed will be obtained. Before using any Aquamira product, the user shall determine the suitability and the fitness of the products for their intended use. The effectiveness of Aquamira products may be limited by environmental or hygienic conditions, such as use with contaminated hands, recontamination after filtration or treatment, failure to maintain a sterile mouthpiece or downstream equipment, sharing with multiple users, exposure to extreme environmental conditions such as heat, freezing, severe shock such as drops or other impact that may damage the integrity of filters, seals or connections. The user assumes all risk and liability in connection with its own tests and use. Aquamira shall not be liable for any injury, loss or damage, direct or consequential, resulting by or from the use, misuse, or inability to use Aquamira products.

CERTIFICATIONS AND PATENTS



Certified by IAPMO R&T to US EPA Microbiological Purifier test standard for the reduction of cysts, bacteria and viruses. Certified to NSF/ANSI 372 for lead free content.

US Patent: #9162167
Other patents pending.

aquamira.

917 West 600 North, Logan, UT 84321
ph: (877) 644-4650
www.aquamira.com
© Copyright 2016 Aquamira Technologies, Inc.

015233

aquamira.