

SEALLINE®

DRY PACK

OWNERS
MANUAL

BLACK CANYON™

BLACK CANYON™ DRY PACK | 65L / 115L



The Black Canyon™ Dry Pack is a versatile large-capacity waterproof pack with a suspension system designed for more comfortable load hauling on canoe/raft trips, canyoneering adventures and travel expeditions. These instructions will show you how to properly seal your pack, attach/detach your harness & waist belt, and take care of your pack.

DRY PACK CARE & USE

To substantially increase the life of dry packs, follow these guidelines: After each use, the pack should be cleaned and air dried; To clean, wash with a soapy brush and rinse; Store pack once completely dry, inside and out; When packing, pad items with hard, sharp corners to minimize wear on the fabric; Keep all insect repellents and solvents from making direct contact with dry packs. If contact occurs, wash the pack thoroughly.

NOTICE

No roll-down closure pack from any manufacturer is 100% waterproof when submerged. This pack is not suitable for protecting items such as optical, electrical or photographic equipment, as submersion or impact may do permanent damage. For such equipment, hard cases with O-ring seals are recommended to protect against impact damage and long-term submersion. SealLine® Dry Packs are intended to protect your equipment and belongings from rain, splash, and spray. They are not intended for submerged use.



LIMITED LIFETIME WARRANTY

For limited warranty information, please go to seallinegear.com/warranty

FOR REPAIR OR WARRANTY SERVICE

Please contact our product service center:

U.S. 1-800-531-9531

CANADA 1-888-801-5335

ONLINE seallinegear.com/warranty

SEALLINE®

©2019 Cascade Designs, Inc.

4000 First Ave. S.

Seattle, WA 98134 U.S.A.


1-800-531-9531

seallinegear.com

#34-047 | EN


CLOSE & SEAL PACK

①

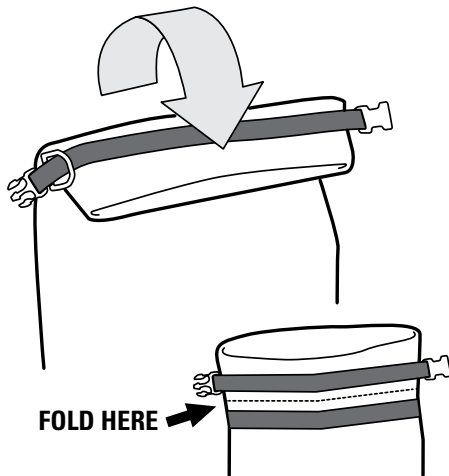

1. **FOLD** To properly close and seal pack, first ensure both black sealing strips are wrinkle-free. Fold the top over toward sealing strips, line up strips, and press together.

②

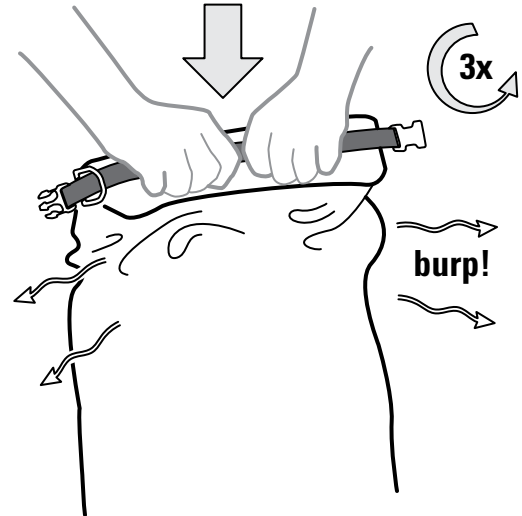

2. **BURP** Hold sealing strips firmly together and push down on the pack to 'burp' out trapped air. Fold and roll tightly at least twice until black strips are no longer visible.

③




3. **CONNECT** Connect both side buckles and cinch down to compress. Place both top straps over fold, buckle, and cinch down for additional compression.

ATTACH/ DETACH & ADJUST SHOULDER HARNESS

DETACH HARNESS


NOTE: The pack comes with the shoulder harness and waist belt attached. To detach for travel or dry bag use, and to adjust torso length, see instructions below.

①




1. Lay the pack down with the back panel facing up. Unthread the webbing from the load lifter straps atop shoulder straps.

②

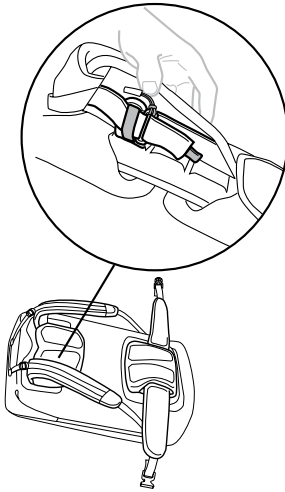

2. Unthread the red tab from the plastic loop at the base of the **yellow cord**.


③

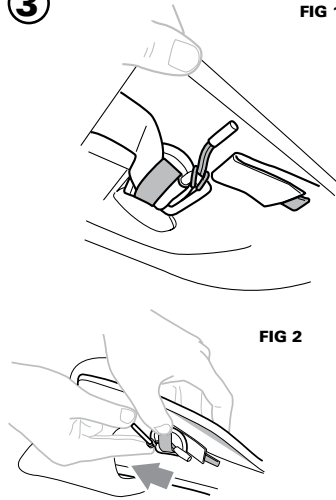

3. Unthread **yellow cord** and plastic loop through **orange strip** (angling tip for more clearance).

FIG 1

④

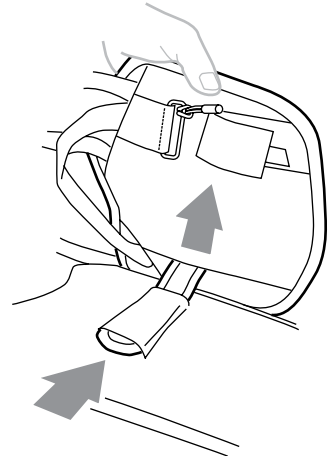


4. Unthread long black tongue until the harness is completely detached.

FIG 2


ATTACH & ADJUST HARNESS

①

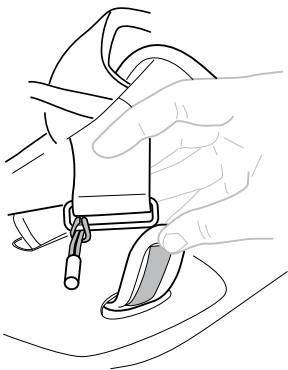


1. Insert the long black tongue into the sleeve between the pack and hard plastic. Lift up the end to expose the **orange strip**.

②

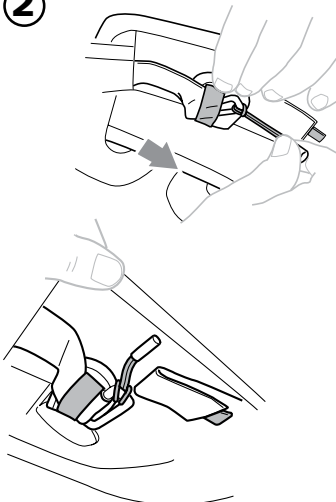

2. Pull the **yellow cord** and plastic loop through the **orange strip** (angling tip for more clearance) to expose the plastic loop on the other side of the **orange strip**.

③

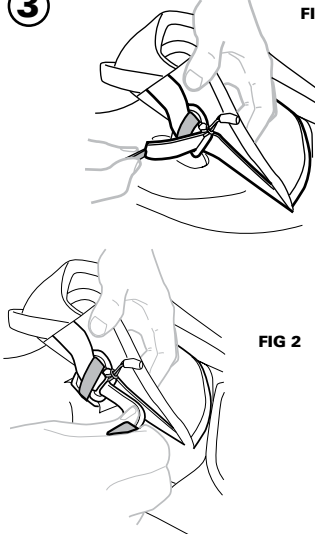


3. Thread the **red tab** through the plastic loop at the base of the **yellow cord**, anchoring the hook and loop together. Your shoulder harness is now attached.

FIG 1

FIG 2

④




4. Thread webbing through the load lifter straps atop shoulder straps and waist belt. Carefully lift pack onto back and adjust straps for optimal carrying comfort.

ATTACH/ DETACH WAIST BELT

DETACH WAIST BELT


NOTE: Pack comes with the waist belt attached. To detach it for travel or dry bag use, see instructions below.

①

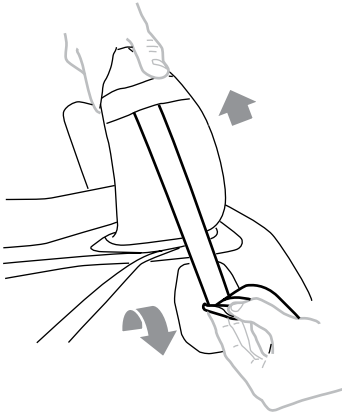


1. Detach webbing from side adjustment buckles.

②

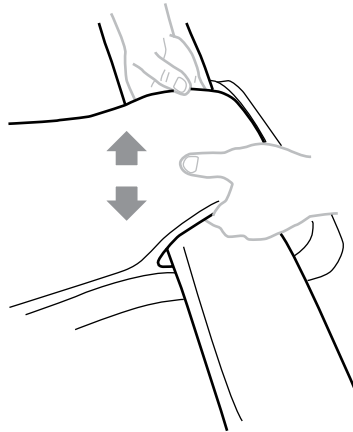

2. Reach under lumbar panel to separate and detach the hook and loop fasteners beneath the panel. (**PRO TIP:** Slide a narrow piece of cardboard or plastic in between panels to prevent the hook and loop fasteners from accidentally re-attaching).


③

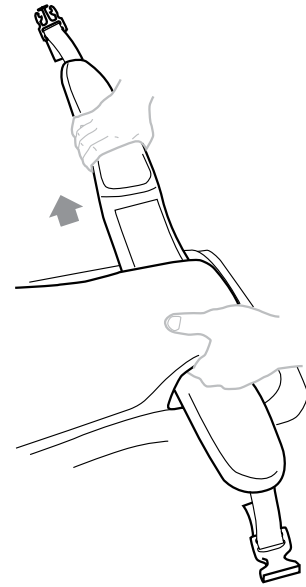

3. Slide waist belt out from beneath the lumbar panel.


ATTACH WAIST BELT

①

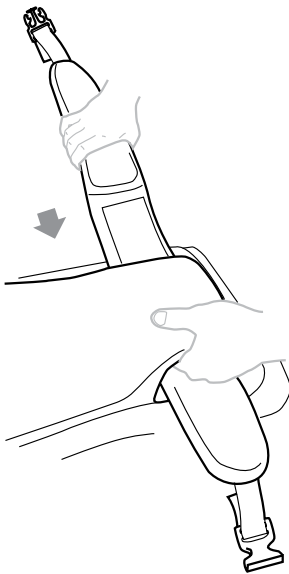

1. Slide waist belt buckle beneath the lumbar panel and pull the waist belt webbing through until the waist belt is centered. (**PRO TIP:** line up stitching on each side of waist belt to confirm it's centered). Press down on the lumbar panel to re-attach the hook and loop fasteners beneath the panel.

②

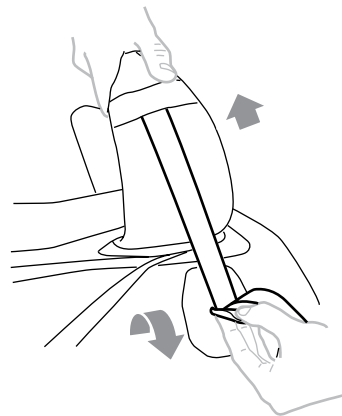

2. Ensure webbing is pulled all the way through and reattach webbing to side adjustment buckles.